




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : <b>H04Q 7/22, H04L 12/56, H04Q 7/38</b>		A1	(11) International Publication Number: <b>WO 00/54523</b>
			(43) International Publication Date: 14 September 2000 (14.09.00)
(21) International Application Number: PCT/FI00/00178		(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, DZ, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KR (Utility model), KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 8 March 2000 (08.03.00)			
(30) Priority Data: 990510 9 March 1999 (09.03.99) FI 991260 2 June 1999 (02.06.99) FI			
(71) Applicant (for all designated States except US): NOKIA NETWORKS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).			
(72) Inventors; and			
(75) Inventors/Applicants (for US only): SOININEN, Jonne [FI/FI]; Urheilukatu 32 A 11, FIN-00250 Helsinki (FI). RAJANIEMI, Jaakko [FI/FI]; Lapinrinne 2 A 11, FIN-00180 Helsinki (FI). MUHONEN, Ahti [FI/FI]; Holperintie 39, FIN-04680 Hirvihaara (FI).			
(74) Agent: KOLSTER OY AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).			
		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	

(54) Title: IP ROUTING OPTIMIZATION IN AN ACCESS NETWORK

## (57) Abstract

In an access network which supports a mobile IP protocol, a very mobile MS might perform several handovers between access nodes during a long session which may cause inefficient mobile IP routing. In the present invention, an access node, which is the target of a handover during an IP session, is arranged to check the optimal routing in respect of the mobile IP, too. For that purpose, the access node is aware of the most preferred mobility agent, normally the closest one, which should be used. In a handover situation the system, preferably the access node, checks (31, 32) whether there is a more preferred mobile IP mobility agent which should substitute for the current mobility agent of the IP session. If there is a more preferred mobility agent for that access node and the preferred mobility agent is not the same as the current mobility agent, the connection to the current mobility agent is closed (33), and a new connection to the preferred mobility agent of the respective access node is opened (34).

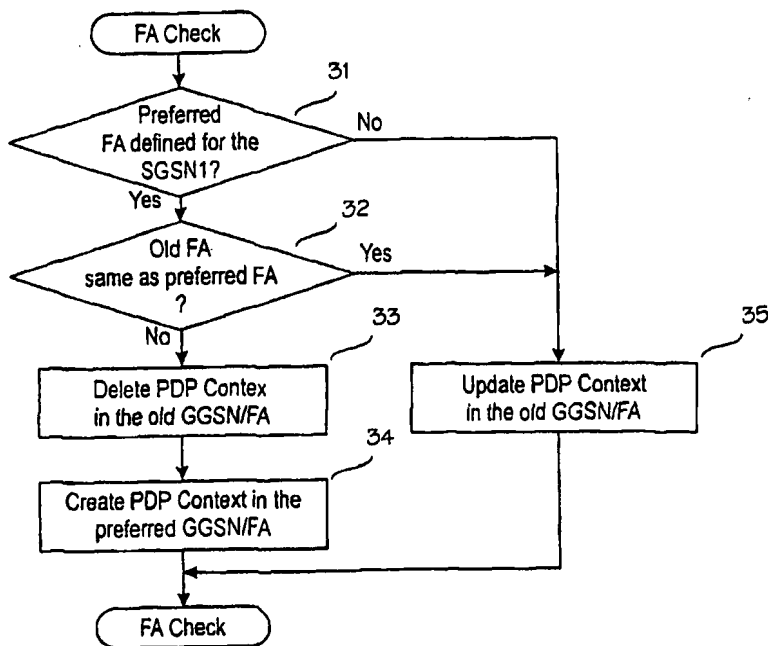

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## IP routing optimization in an access network

### Field of the Invention

The invention relates to a mechanism for optimizing the routing of macro level traffic, such as Internet-type protocol traffic, in an access network,  
5 such as a radio access network.

### Background of the Invention

Mobile communications system refers generally to any telecommunications system which enable wireless communication when users are moving within the service area of the system. A typical mobile communications  
10 system is a Public Land Mobile Network (PLMN). Often the mobile communications network is an access network providing a user with wireless access to external networks, hosts, or services offered by specific service providers.

The general packet radio service GPRS is a new service in the GSM system (Global System for Mobile communication). A subnetwork comprises a number of packet data service nodes SN, which in this application will  
15 be referred to as serving GPRS support nodes SGSN. Each SGSN is connected to the GSM mobile communication network (typically to a base station controller BSC or a base station BTS in a base station system) so that the SGSN can provide a packet service for mobile data terminals via several base  
20 stations, i.e. cells. The intermediate mobile communication network provides radio access and packet-switched data transmission between the SGSN and mobile data terminals. Different subnetworks are in turn connected to an external data network, e.g. to a public switched data network PSPDN, via GPRS  
25 gateway support nodes GGSN. The GPRS service thus allows to provide packet data transmission between mobile data terminals and external data networks when the GSM network functions as a radio access network RAN.

Third generation mobile systems, such as Universal Mobile Communications system (UMTS) and Future Public Land Mobile Telecommunications system (FPLMTS), later renamed as IMT-2000 (International Mobile  
30 Telecommunication 2000), are being developed. In the UMTS architecture a UMTS terrestrial radio access network, UTRAN, consists of a set of radio access networks RAN (also called radio network subsystem RNS) connected to the core network (CN). Each RAN is responsible for the resources of its set of cells. For each connection between a mobile station MS and the UTRAN, one  
35 RAN is a serving RAN. A RAN consists of a radio network controller RNC and

a multiplicity of base stations BS. One core network which will use the UMTS radio access network is the GPRS.

One of the main targets in the development of mobile communication networks is to provide an IP (Internet Protocol) service with a standard IP backbone which would use a combination of different types of mobile network mobility managements in the mobile networks and Mobile IP. The basic IP concept does not support the mobility of the user: the IP addresses are assigned to network interfaces in dependence on their physical location. In fact, the first field of an IP address (the NETID) is common to all interfaces that are linked to the same Internet subnet. This scheme prevents the user (the mobile host) from keeping its address while moving over different Internet subnets, i.e. while changing the physical interface.

In order to enhance the mobility in the Internet, a Mobile IP protocol for IP version 4 have been introduced by the Internet Engineering Task Force (IETF) in the standard RFC2002. Mobile IP enables the routing of IP datagrams to mobile hosts, independently of the point of attachment in the sub-network. The mobile IP protocol introduces the following new functional or architectural entities.

'Mobile Node MN' (also called Mobile Host MH) refers to a host that changes its point of attachment from one network or subnetwork to another. A mobile node may change its location without changing its IP address; it may continue to communicate with other Internet nodes at any location using its (constant) IP address. 'Mobile Station (MS)' is a mobile node having a radio interface to the network. A 'Tunnel' is the path followed by a datagram when it is encapsulated. In this model a datagram, while encapsulated, is routed to a known decapsulation agent, which decapsulates the datagram and then correctly delivers it to its ultimate destination. Each mobile node is connected to a home agent over a unique tunnel, identified by a tunnel identifier which is unique to a given Foreign Agent/Home Agent pair.

'Home Network' is the IP network to which a user logically belongs. Physically, it can be e.g. a local area network (LAN) connected via a router to the Internet. 'Home Address' is an address that is assigned to a mobile node for an extended period of time. It may remain unchanged regardless of where the MN is attached to the Internet. Alternatively, it could be assigned from a pool of addresses.

'Mobility Agent' is either a home agent or a foreign agent. 'Home Agent HA' is a routing entity in a mobile node's home network which tunnels packets for delivery to the mobile node when it is away from home, and maintains current location information for the mobile node. It tunnels datagrams for delivery to, and, optionally, detunnels datagrams from, a mobile node when the mobile node is away from home. 'Foreign Agent FA' refers to a routing entity in a mobile node's visited network which provides routing services for the mobile node while registered, thus allowing the mobile node to utilise its home network address. The foreign agent detunnels and delivers packets to the mobile node that were tunnelled by the mobile node's home agent. For datagrams sent by a mobile node, the foreign agent may serve as a default router for registered mobile nodes.

RFC2002 defines 'Care-of Address' (COA) as the termination point of a tunnel toward a mobile node for datagrams forwarded to the mobile node while it is away from home. The protocol can use two different types of care-of address: a "foreign agent care-of address" is an address announced by a foreign agent with which the mobile node is registered, and a "co-located care-of address" is an externally obtained local address which the mobile node has acquired in the network. An MN may have several COAs at the same time. An MN's COA is registered with its HA. The list of COAs is updated when the mobile node receives advertisements from foreign agents. If an advertisement expires, its entry or entries should be deleted from the list. One foreign agent can provide more than one COA in its advertisements. 'Mobility Binding' is the association of a home address with a care-of address, along with the remaining lifetime of that association. An MN registers its COA with its HA by sending a Registration Request. The HA replies with a Registration Reply and retains a binding for the MN.

A single generic mobility handling mechanism that allows roaming between all types of access networks would allow the user to conveniently move between fixed and mobile networks, between public and private networks as well as between PLMN's with different access technologies. Therefore, mechanisms supporting the Mobile IP functionality are also being developed in mobile communication systems, such as UMTS and GPRS.

It is desired that the Mobile IP be implemented as an overlay of the UMTS/GPRS network while maintaining backwards compatibility with present systems, assuming minimal modifications in the GPRS standards and in net-

works whose operators do not want to support the MIP. Fig. 1 illustrates the minimum configuration for a GPRS operator who wishes to offer the mobile IP service. The current GPRS structure is maintained, i.e. the GPRS handles the mobility within the PLMN, while the MIP allows the user to roam between other systems, such as LAN's, and UMTS without losing an ongoing session. In Fig. 1 the foreign agents FA are located at GGSNs. All GGSNs may not have FAs. The SGSN and the GGSN may also be co-located. One FA in a PLMN is sufficient for offering the MIP service, but for capacity and efficiency reasons, more than one may be recommendable. This means that the MS must request a PDP context to be set up with a GGSN that offers FA functionality. While setting up the PDP context, the MS is informed about network parameters of the FA, e.g. care-of address.

The MS may have the same care-of address COA during a session, i.e. as long as a PDP context is activated. A very mobile MS might perform several inter-SGSN HOs during a long session which may cause inefficient routing. As an initial improvement, a streamlining procedure, with a temporary anchoring point in the GGSN, could be introduced: If the MN is not transferring data, or is possibly even in the active state while moving from one SGSN to another, a new PDP context could be setup between the new SGSN and its associated GGSN at the handover. The MN will receive a new care-of address. If the MN were transferring data, e.g. were involved in a TCP session, the MN would move from the old SGSN to the new one while keeping the PDP Context in the old (anchor) GGSN for the duration of the data transfer. Once the data transfer is terminated, the PDP Context can be moved to the GGSN associated with the new SGSN and a new care-of address can be obtained.

The problem is how to discover the movement and to find a new foreign agent FA, preferably the nearest one, when the MN is moving from one SGSN to another. The GPRS terminal (MS) is naturally aware of the change of the SGSN on the GPRS protocol level as described above but this change is transparent to the overlaying MIP protocol and the mobile node MN associated with the GPRS terminal MS.

Similar problems may be encountered in any mobility management and routing on a system level overlaying the mobility management of an access network. These various overlaying mobility managements are commonly referred to as macro mobility management herein.

### Disclosure of the Invention

An object of the present invention is to overcome or alleviate the above described problems.

The object is achieved by a method, a system and an access node  
5 which are characterized by what is disclosed in the attached independent claims. Preferred embodiments of the invention are disclosed in the attached dependent claims.

In the present invention a support node, or more generally any access node, which is the target of a handover during a session, is arranged to  
10 check the optimal routing in respect of macro mobility management, too. For that purpose, the access node is aware of the most preferred mobility entity, normally the closest one, which should be used. A mobility entity may be any entity which provides a point of attachment on the macro mobility level, such as a mobility agent in the mobile IP-type mobility management. In a handover  
15 situation the system, preferably the access node, checks whether there is a more preferred mobility entity which should substitute for the current mobility entity of the session. If there is no preferred mobility entity for that access node, or the preferred mobility entity appears to be the same as the current mobility entity of the session, the current mobility entity is maintained. However,  
20 if there is a more preferred mobility entity for that access node and the preferred mobility entity is not the same as the current mobility entity, the connection (e.g. a PDP context) to the current mobility entity is preferably closed (released), and a new connection (e.g. PDP context) to the preferred mobility entity of the respective access node is opened. Registration in accordance  
25 with the specific macro mobility management scheme can be carried out.

In the preferred embodiment of the invention the macro mobility management is mobile IP-type mobility management. A typical feature of the mobility agent in the mobile IP is that it periodically transmits agent advertisement messages to the mobile nodes in order to advertise its services. The  
30 mobile nodes use these advertisements to determine the current point of attachment to the Internet. In merit of the new connection established by the access node to the preferred mobility agent, the agent advertisement messages sent by the new mobility agent can be received by the mobile node, and thereby the mobile node is able to detect the change of the attachment point  
35 (i.e. mobility agent) and to initiate standard mobile IP registration.

Thus, an advantage of the invention is that the inventive new functionality in the access node also enables to detect the movement of a mobile node on the macro mobility level, such as the mobile IP level, and to select and change the most optimal mobility entity in each part of the network, without needing any non-standard signalling or procedure in other elements of the access network or on the macro mobility management level.

In the packet access network a mobile station which the mobile node is associated with may have two or more packet protocol (PDP) contexts open at the same time. The above described new connection should be established for any macro mobility related PDP context the mobile station may have. However, all of the PDP contexts are not necessarily related to the macro mobility management and therefore should not be involved in the change of the mobility entity. Thus, there may be need for the access node to be able to distinguish the macro mobility management dedicated PDP contexts from other active PDP contexts of the mobile station. In an embodiment of the invention, the information transferred from the old access node to the new access node is provided with an information field which indicates the different types of the PDP contexts, or at least the macro mobility management related PDP contexts. This allows the PDP context types to be distinguished, and therefore, also the macro mobility management related PDP context can be recognized and the mobility entity of the recognized PDP contexts changed by the access node.

The route optimization saves the transmission resources in the packet radio system, and possibly also makes the connection faster as the connection leg between the access node and the mobility entity is shorter.

### **Brief description of the Drawings**

In the following, the invention will be described in greater detail by means of preferred embodiments with reference to the accompanying drawings, in which

Figure 1 illustrates GPRS network architecture,

Figure 2 is a signalling diagram illustrating the method according to the invention,

Figure 3 is a flow diagram illustrating the function of the support node,



Figure 4 is a signalling diagram illustrating the method according to the invention.

### Preferred Embodiments of the Invention

5           The present invention can be applied to any communications requiring macro mobility management which overlays the mobility management of an access network. The invention suits especially well for supporting mobile IP-type mobility management in an access network. The access network may be any access network, such as a radio access network. The invention can be especially preferably used for providing a general packet radio service GPRS  
10 in the pan-European digital mobile communication system GSM (Global System for Mobile Communication) or in corresponding mobile communication systems, such as DCS1800 and PCS (Personal Communication System), or in third generation (3G) mobile systems, such as UMTS, implementing a GPRS-type packet radio. In the following, the preferred embodiments of the invention  
15 will be described by means of a GPRS packet radio network formed by the GPRS service and the 3G or GSM system without limiting the invention to this particular access system.

A GPRS architecture utilizing 3G radio access (such as UMTS) or  
20 2G radio access (such as GSM) is illustrated in Fig. 1. The GPRS infrastructure comprises support nodes such as a GPRS gateway support node (GGSN) and a GPRS serving support node (SGSN). The main functions of the GGSN nodes involve interaction with the external data network. The GGSN updates the location directory using routing information supplied by the SGSNs about an MS's path and routes the external data network protocol  
25 packet encapsulated over the GPRS backbone to the SGSN currently serving the MS. It also decapsulates and forwards external data network packets to the appropriate data network and handles the billing of data traffic.

The main functions of the SGSN are to detect new GPRS mobile  
30 stations in its service area, handle the process of registering the new MSs along with the GPRS registers, send/receive data packets to/from the GPRS MS, and keep a record of the location of the MSs inside of its service area. The subscription information is stored in a GPRS register (HLR) where the mapping between a mobile's identity (such as MS-ISDN or IMSI) and the  
35 PSPDN address are stored. The GPRS register acts as a database from which

the SGSNs can ask whether a new MS in its area is allowed to join the GPRS network.

The GPRS gateway support nodes GGSN connect an operator's GPRS network to external systems, such as other operators' GPRS systems, data networks 11, such as an IP network (Internet) or an X.25 network, and service centres. Fixed hosts 14 can be connected to the data network 11 e.g. by means of a local area network LAN and a router 15. A border gateway BG provides access to an inter-operator GPRS backbone network 12. The GGSN may also be connected directly to a private corporate network or a host. The GGSN includes GPRS subscribers' PDP addresses and routing information, i.e. SGSN addresses. Routing information is used for tunnelling protocol data units PDU from the data network 11 to the current switching point of the MS, i.e. to the serving SGSN. The functionalities of the SGSN and GGSN can be connected to the same physical node (SGSN+GGSN).

The home location register HLR of the GSM network contains GPRS subscriber data and routing information, and it maps the subscriber's IMSI into one or more pairs of the PDP type and PDP address. The HLR also maps each PDP type and PDP address pair into a GGSN node. The SGSN has a Gr interface to the HLR (a direct signalling connection or via an internal backbone network 13). The HLR of a roaming MS and its serving SGSN may be in different mobile communication networks.

The intra-operator backbone network 13, which interconnects an operator's SGSN and GGSN equipment, can be implemented, for example, by means of a local network, such as an IP network. It should be noted that an operator's GPRS network can also be implemented without the intra-operator backbone network, e.g. by providing all features in one computer.

Network access is the means by which a user is connected to a telecommunication network in order to use the services and/or facilities of that network. An access protocol is a defined set of procedures that enables the user to employ the services and/or facilities of the network. The SGSN, which is at the same hierarchical level as the mobile switching centre MSC, keeps track of the individual MSs' location and performs security functions and access control. GPRS security functionality is equivalent to the existing GSM security. The SGSN performs authentication and cipher setting procedures based on the same algorithms, keys, and criteria as in the existing GSM. The GPRS uses a ciphering algorithm optimised for packet data transmission.

In order to access the GPRS services, an MS will first make its presence known to the network by performing a GPRS attach. This operation establishes a logical link between the MS and the SGSN, and makes the MS available for the SMS over the GPRS, paging via the SGSN, and notification of incoming GPRS data. More particularly, when the MS attaches to the GPRS network, i.e. in a GPRS attach procedure, the SGSN creates a mobility management context (MM context), and a logical link LLC (Logical Link Control) is established between the MS and the SGSN in a protocol layer. MM contexts are stored in the SGSN and MS. The MM context of the SGSN may contain subscriber data, such as the subscriber's IMSI, TLLI and location and routing information, etc.

In order to send and receive GPRS data, the MS will activate the packet data address that it wants to use, by requesting a PDP activation procedure. This operation makes the MS known in the corresponding GGSN, and interworking with external data networks can begin. More particularly, one or more PDP contexts are created in the MS, GGSN and SGSN, and stored in the serving SGSN in connection with the MM context. The PDP context defines different data transmission parameters, such as the PDP type (e.g. X.25 or IP), PDP address (e.g. IP address), quality of service QoS and NSAPI (Network Service Access Point Identifier). The MS activates the PDU context with a specific message, Activate PDP Context Request, in which it gives information on the TLLI, PDP type, PDP address, required QoS and NSAPI, and optionally the access point name APN. The SGSN sends a create PDP context message to the GGSN which creates the PDP context and sends it to the SGSN. The SGSN sends the PDP context to the MS in a Activate PDP Context Response message, and a virtual connection or link between the MS and the GGSN is established. As a result, the SGSN forwards all the data packets from the MS to the GGSN, and the GGSN forwards to the SGSN all data packets received from the external network and addressed to the MS. The PDP context is stored in the MS, SGSN and GGSN. When the MS roams to the area of a new SGSN, the new SGSN requests MM and PDP contexts from the old SGSN.

Fig. 1 illustrates the implementation of mobile IP in the GPRS/3G environment.

The MS can be a laptop computer PC connected to a packet radio enabled cellular telephone. Alternatively, the MS can be an integrated combi-

nation of a small computer and a packet radio telephone, similar in appearance to the Nokia Communicator 9000 series. Yet further embodiments of the MS are various pagers, remote-controllers, surveillance and/or data-acquisition devices, etc. The user of a mobile station MS subscribes to a special Mobile IP service. The subscription information is stored in the Home Location Register HLR together with the user's home IP address.

In Fig. 1 the foreign agents FA are located in (integrated into) GGSNs. Alternatively, the SGSN and the GGSN are co-located, and the FAs are located in SGSN+GGSNs. It should be noted that there may be more than one SGSN and GGSN in one network. All GGSNs may not have FAs. Each FA has an IP address in the Internet and in the operator's own private GPRS/3G backbone network. More precisely, the FA's IP address is such that IP packets destined to that address are routed in the Internet to the GGSN associated with the FA. When the MN leaves its home subnet and registers to a new FA, it can no longer be reached on the basis of its home IP address alone, but must be assigned an address belonging to the visited network, called the care-of address (COA). The care-of address positively identifies the instantaneous location of the mobile terminal and may be: 1) the IP address of the FA belonging to the visited network, or 2) an IP address acquired directly by the mobile terminal through an autoconfiguration mechanism from the local IP address space, in which case the term co-located care-of address is used. When registering to a new FA and obtaining a COA, the MN which registers with a home agent HA in its home network informs the latter of its COA. In Fig. 1 a home agent HA is located in a data network 11 which is the home network of the mobile node MN associated with the mobile station MS. A second host 14 wishing to communicate with the MN need not be aware of the fact that the MN has moved: it simply sends IP packets addressed to MN's home IP address. These packets are routed via normal IP routing to the MN's home network, there they are intercepted by the HA. The HA encapsulates each such packet in another IP packet which contains the MN's COA as these packets are thus delivered to the FA (a process called tunnelling). The FA forwards the IP packet to the GGSN. The GGSN forwards the IP packet (which may be encapsulated for transmission over the GPRS backbone) to the serving SGSN which further forwards the IP packet to the MS/MN. Packets from the MN to the other host 14 need not necessarily be tunneled: the MN may simply send

the  
wit

5 ter  
or  
ere

10 bil  
su  
a  
is

ac  
ho  
mc  
15 be  
ga  
IP

ne  
ac  
20 pr

ar  
th  
m

25 id  
vi  
m

cl  
ne  
30 S

am  
cc  
A  
tr

35 a  
a

Figure 4 is a signalling diagram illustrating the method according to the invention.

### Preferred Embodiments of the Invention

5           The present invention can be applied to any communications requiring macro mobility management which overlays the mobility management of an access network. The invention suits especially well for supporting mobile IP-type mobility management in an access network. The access network may be any access network, such as a radio access network. The invention can be especially preferably used for providing a general packet radio service GPRS 10 in the pan-European digital mobile communication system GSM (Global System for Mobile Communication) or in corresponding mobile communication systems, such as DCS1800 and PCS (Personal Communication System), or in third generation (3G) mobile systems, such as UMTS, implementing a GPRS-type packet radio. In the following, the preferred embodiments of the invention 15 will be described by means of a GPRS packet radio network formed by the GPRS service and the 3G or GSM system without limiting the invention to this particular access system.

A GPRS architecture utilizing 3G radio access (such as UMTS) or 20 2G radio access (such as GSM) is illustrated in Fig. 1. The GPRS infrastructure comprises support nodes such as a GPRS gateway support node (GGSN) and a GPRS serving support node (SGSN). The main functions of the GGSN nodes involve interaction with the external data network. The GGSN updates the location directory using routing information supplied by the SGSNs about an MS's path and routes the external data network protocol 25 packet encapsulated over the GPRS backbone to the SGSN currently serving the MS. It also decapsulates and forwards external data network packets to the appropriate data network and handles the billing of data traffic.

The main functions of the SGSN are to detect new GPRS mobile 30 stations in its service area, handle the process of registering the new MSs along with the GPRS registers, send/receive data packets to/from the GPRS MS, and keep a record of the location of the MSs inside of its service area. The subscription information is stored in a GPRS register (HLR) where the mapping between a mobile's identity (such as MS-ISDN or IMSI) and the PSPDN address are stored. The GPRS register acts as a database from which 35

the SGSNs can ask whether a new MS in its area is allowed to join the GPRS network.

The GPRS gateway support nodes GGSN connect an operator's GPRS network to external systems, such as other operators' GPRS systems, data networks 11, such as an IP network (Internet) or an X.25 network, and service centres. Fixed hosts 14 can be connected to the data network 11 e.g. by means of a local area network LAN and a router 15. A border gateway BG provides access to an inter-operator GPRS backbone network 12. The GGSN may also be connected directly to a private corporate network or a host. The GGSN includes GPRS subscribers' PDP addresses and routing information, i.e. SGSN addresses. Routing information is used for tunnelling protocol data units PDU from the data network 11 to the current switching point of the MS, i.e. to the serving SGSN. The functionalities of the SGSN and GGSN can be connected to the same physical node (SGSN+GGSN).

The home location register HLR of the GSM network contains GPRS subscriber data and routing information, and it maps the subscriber's IMSI into one or more pairs of the PDP type and PDP address. The HLR also maps each PDP type and PDP address pair into a GGSN node. The SGSN has a Gr interface to the HLR (a direct signalling connection or via an internal backbone network 13). The HLR of a roaming MS and its serving SGSN may be in different mobile communication networks.

The intra-operator backbone network 13, which interconnects an operator's SGSN and GGSN equipment, can be implemented, for example, by means of a local network, such as an IP network. It should be noted that an operator's GPRS network can also be implemented without the intra-operator backbone network, e.g. by providing all features in one computer.

Network access is the means by which a user is connected to a telecommunication network in order to use the services and/or facilities of that network. An access protocol is a defined set of procedures that enables the user to employ the services and/or facilities of the network. The SGSN, which is at the same hierarchical level as the mobile switching centre MSC, keeps track of the individual MSs' location and performs security functions and access control. GPRS security functionality is equivalent to the existing GSM security. The SGSN performs authentication and cipher setting procedures based on the same algorithms, keys, and criteria as in the existing GSM. The GPRS uses a ciphering algorithm optimised for packet data transmission.

In order to access the GPRS services, an MS will first make its presence known to the network by performing a GPRS attach. This operation establishes a logical link between the MS and the SGSN, and makes the MS available for the SMS over the GPRS, paging via the SGSN, and notification of  
5 incoming GPRS data. More particularly, when the MS attaches to the GPRS network, i.e. in a GPRS attach procedure, the SGSN creates a mobility management context (MM context), and a logical link LLC (Logical Link Control) is established between the MS and the SGSN in a protocol layer. MM contexts are stored in the SGSN and MS. The MM context of the SGSN may contain  
10 subscriber data, such as the subscriber's IMSI, TLLI and location and routing information, etc.

In order to send and receive GPRS data, the MS will activate the packet data address that it wants to use, by requesting a PDP activation procedure. This operation makes the MS known in the corresponding GGSN, and  
15 interworking with external data networks can begin. More particularly, one or more PDP contexts are created in the MS, GGSN and SGSN, and stored in the serving SGSN in connection with the MM context. The PDP context defines different data transmission parameters, such as the PDP type (e.g. X.25 or IP), PDP address (e.g. IP address), quality of service QoS and NSAPI  
20 (Network Service Access Point Identifier). The MS activates the PDP context with a specific message, Activate PDP Context Request, in which it gives information on the TLLI, PDP type, PDP address, required QoS and NSAPI, and optionally the access point name APN. The SGSN sends a create PDP context message to the GGSN which creates the PDP context and sends it to the  
25 SGSN. The SGSN sends the PDP context to the MS in a Activate PDP Context Response message, and a virtual connection or link between the MS and the GGSN is established. As a result, the SGSN forwards all the data packets from the MS to the GGSN, and the GGSN forwards to the SGSN all data packets received from the external network and addressed to the MS. The  
30 PDP context is stored in the MS, SGSN and GGSN. When the MS roams to the area of a new SGSN, the new SGSN requests MM and PDP contexts from the old SGSN.

Fig. 1 illustrates the implementation of mobile IP in the GPRS/3G environment.

35 The MS can be a laptop computer PC connected to a packet radio enabled cellular telephone. Alternatively, the MS can be an integrated combi-



nation of a small computer and a packet radio telephone, similar in appearance to the Nokia Communicator 9000 series. Yet further embodiments of the MS are various pagers, remote-controllers, surveillance and/or data-acquisition devices, etc. The user of a mobile station MS subscribes to a special Mobile IP service. The subscription information is stored in the Home Location Register HLR together with the user's home IP address.

In Fig. 1 the foreign agents FA are located in (integrated into) GGSNs. Alternatively, the SGSN and the GGSN are co-located, and the FAs are located in SGSN+GGSNs. It should be noted that there may be more than one SGSN and GGSN in one network. All GGSNs may not have FAs. Each FA has an IP address in the Internet and in the operator's own private GPRS/3G backbone network. More precisely, the FA's IP address is such that IP packets destined to that address are routed in the Internet to the GGSN associated with the FA. When the MN leaves its home subnet and registers to a new FA, it can no longer be reached on the basis of its home IP address alone, but must be assigned an address belonging to the visited network, called the care-of address (COA). The care-of address positively identifies the instantaneous location of the mobile terminal and may be: 1) the IP address of the FA belonging to the visited network, or 2) an IP address acquired directly by the mobile terminal through an autoconfiguration mechanism from the local IP address space, in which case the term co-located care-of address is used. When registering to a new FA and obtaining a COA, the MN which registers with a home agent HA in its home network informs the latter of its COA. In Fig. 1 a home agent HA is located in a data network 11 which is the home network of the mobile node MN associated with the mobile station MS. A second host 14 wishing to communicate with the MN need not be aware of the fact that the MN has moved: it simply sends IP packets addressed to MN's home IP address. These packets are routed via normal IP routing to the MN's home network, there they are intercepted by the HA. The HA encapsulates each such packet in another IP packet which contains the MN's COA as these packets are thus delivered to the FA (a process called tunnelling). The FA forwards the IP packet to the GGSN. The GGSN forwards the IP packet (which may be encapsulated for transmission over the GPRS backbone) to the serving SGSN which further forwards the IP packet to the MS/MN. Packets from the MN to the other host 14 need not necessarily be tunneled: the MN may simply send

them to the GGSN which directly forwards the packets to the second host 14, without interception by the FA or the HA.

As noted above, according to the present invention the SGSN determines whether it is preferable to change the mobility agent of the IP session or not. A preferred embodiment of the invention will be now described with reference to Figures 1, 2, 3 and 4.

A reference is now made to Figure 1. The home network of the mobile station MS is the GPRS/3G network 1. The user of the mobile station MS subscribes to a special mobile IP service, and an IP application in the MS or in a separate data terminal is a mobile node MN in a mobile IP communication. It is assumed that the MS/MN is attached to the home network 1 and the radio access network RAN1 (PS1 and PSC/RNC1). A serving support node in the home network is SGSN1. MM and PDP contexts have been created for the mobile IP service as described above, and a virtual connection is provided between the MS/MN and the SGSN1 as well as between the SGSN1 and a gateway node GGSN1 which has an associated foreign agent FA1. Thus, the IP packets addressed to the MN can be forwarded to the MN over the home network 1 and RAN1. The COA of the MN has been registered to the home agent HA in the home network 11 of the MN, so that mobile IP tunnelling is provided from the HA to the GGSN/FA1.

Let us now assume that the MS/MN moves to the service area of another GPRS/3G network 2 which is served by support node SGSN2. When the MS/MN arrives at a new RAN2, the MS part listens to radio broadcast messages, which contain information about radio parameters, network and cell identity, etc. as well as information about available core network, service providers, service capabilities etc. On the basis of the broadcast the MS determines that the network and/or the routing area has changed. Upon detecting a change of routing area, the MS/MN sends a routing area update request to the new SGSN, namely SGSN2, as shown in Figure 2. The new SGSN2 sends a SGSN context request message to the old SGSN1 (in step 2) to obtain the MN and PDP contexts for the MS/MN. The old SGSN1 responds with a SGSN context response message which contains the MN and PDP contexts (step 3). According to the preferred embodiment of the invention, the information transferred from the old access node to the access node may be provided with an information field which indicates the different types of the PDP contexts, or at least the Mobile IP related PDP contexts. This allows the SGSN to distin-

guish the Mobile IP dedicated PDP contexts from other active PDP contexts of the mobile station which should not be involved in the change of the mobility agent. There are various possible ways to implement the PDP context type information. For example, a PDP Context Information Element, which is carried in the SGSN Context Response message in the GPRS (and in the forward SNRC relocation message in the UMTS) may be provided with a field indicating the type of service used over the PDP context. The type field may contain an access Point Name which has a value indicating a Mobile IP PDP context. Spare bits in the PDP Context Information Element may be used for the new field, or alternatively the new field may be an extension of the current PDP Context Information Element format. It should be noted, however, that the exact implementation is not relevant to the invention. It is only relevant, in this specific embodiment, that the information received from the old SGSN enables the new SGSN to determine which one(s) of the PDP contexts is (are) dedicated to the Mobile IP.

In step 4 the new SGSN2 may, in certain situations, execute authentication/security functions which may involve an interrogation to the HLR of the MS/MN. If the user has at least one activated PDP context, the new SGSN2 sends a SGSN context acknowledge message to the old SGSN1. The old SGSN1 may now start forwarding of buffered data packets belonging to the activated PDP context, if any, to the new SGSN2. The new SGSN2 will now execute the foreign agent check procedure according to the present invention, step 6, if there is at least one PDP context for the Mobile IP. The FA check procedure according to the preferred embodiment of the present invention is illustrated in Figure 3. In step 31 the new SGSN2 checks whether there is a preferred FA defined for it. For example, the SGSN2 may check whether there is an address of a preferred FA2 stored in the SGSN2. In this example, the address of the GGSN/FA2 is found, and the procedure proceeds to step 32. In step 32 the new SGSN2 checks whether the address of the old FA1 obtained in the PDP context from the old SGSN1 is the same as the stored address of the preferred FA2. In this example, the old FA1 is in the GGSN1 and the preferred FA2 of the SGSN2 is in the GGSN2, and the addresses do not match. The procedure proceeds to the step 33 in which the new SGSN2 deletes the PDP context in the old GGSN/FA1 by sending a delete PDP context requests to the old GGSN/FA1, as shown in Figure 2. As a result, any active PDP context in the GGSN/FA1 is deactivated, and the GGSN/FA1 ac-

knowledges by sending a delete PDP context response to the new SGSN2 (step 8 in Figure 2). Referring again to Figure 3, the process proceeds to step 34 wherein the new SGSN2 creates a PDP context in the preferred GGSN/FA2 by sending a create PDP context requests to the new GGSN/FA2 (step 9 in Figure 2). The GGSN/FA2 creates the PDP context for the MS/MN and returns a create PDP context response to the new SGSN2 (step 10 in Figure 2). The new SGSN2 establishes MN and PDP contexts for the MS/MN, and responds to the MS/MN with routing area update accept message (step 11). The MS/MN acknowledges with a routing area update complete message (step 12). A virtual connection has thus been established between the MS/MN and the GGSN/FA2.

All the previous procedures have been executed in the GPRS/3G layer only. The overlaying mobile IP layer and thereby the MN part of the MS/MN are not aware of the change of the FA. However, due to the newly established connection to the GGSN/FA2 the MN is able to hear the agent advertisement messages broadcast by the new FA2 in accordance with the mobile IP protocol. Upon receiving the agent advertisement from the new FA2, the MN is able to detect a change in the point of attachment, i.e. change of FA, in accordance with the MIP standard. The agent advertisement message may also include the care-of-address COA, or the MN may acquire the COA in accordance with the MIP standard. Then the mobile node MN registers its COA with its home agent HA in accordance with the MIP standard (step 14 in Figure 2). Depending on its method of attachment, the MN will register either directly with its HA, or through the new FA which forwards the registration to the HA. Thereafter, the mobile IP tunnelling between the HA and the old GGSN/FA1 is released and new mobile IP tunnelling is established between the HA and the new GGSN/FA2, in accordance with the mobile procedures (step 15 in Figure 2).

As a result, the change of FA has been detected and established using standard GPRS/3G procedures and messages and standard mobile IP procedures and messages everywhere else but in the SGSN2. Also in the SGSN2 only minor modifications are needed. Firstly, a preferred FA has to be defined for the SGSN2. Secondly, the need for an FA change needs to be executed. Thirdly, the new SGSN is arranged to automatically and independently (without involvement of the MS) delete the PDP context in the old GGSN and to create a new PDP context in the new GGSN.

Referring again to Figure 3, if no preferred FA is defined for the SGSN1 in step 31, or the old FA is the same as the preferred FA (the addresses match) in step 32, the process proceeds to step 35. In step 35 the new SGSN1 updates the PDP context in the old GGSN/FA1, as shown in step 41 in Figure 4. The old GGSN/FA1 updates the PDP context to contain the address of the new SGSN2, and sends an update PDP context response to the new SGSN2 in step 42. Then the new SGSN2 sends the RA update accept message to the MS/MN (step 43) and the MS/MN responds with the RA update complete message (step 44). A virtual connection is thus established between the MS/MN and the old GGSN/FA via the new SGSN1. As the FA and the COA are unchanged, no registration to the HA is needed. In Figure 4 steps 1 to 6 are similar to those in Figure 2.

The description only illustrates preferred embodiments of the invention. The invention is not, however, limited to these examples, but it may vary within the scope and spirit of the appended claims.

## Claims

1. A method of providing macro mobility management for a mobile node in an access system comprising a plurality of mobile nodes (MS/MN), a first and a second access node (SGSN1, SGSN2) serving said mobile nodes within the first (RAN1) and second (RAN2) parts of the access system, respectively, at least one first gateway node (GGSN1) for interfacing said first part (RAN1) of the access system with external networks (12), and a first mobility entity (FA1) which is associated with said at least one first gateway node (GGSN1) and arranged to provide macro mobility management routing services to the mobile nodes (MS/MN) while registered to the first part (RAN1) of the access system, said method comprising steps of
- establishing a session between one of said plurality of mobile nodes (MS/MN) and a second party via said first access node (SGSN1) and said first mobility entity (FA1),
- characterized by further steps of
- checking whether there is a second mobility entity (FA2) which is more preferred in respect of routing than said first mobility entity (FA1), and
- reacting to said checking by
- A) maintaining a connection to said first mobility entity (FA1) if there is no second mobility entity which is more preferred than said first one, and
- B) opening new connection to said second mobility entity (FA2) if said more preferred second mobility entity is available, and initiating macro mobility management registration.
2. The method according to claim 1, characterized by re-routing the session via said second access node (SGSN2) in response to a movement of said one of mobile nodes (MS(MN) to said second part (RAN2) of the system.
3. The method according to claim 1 or 2, characterized by closing the connection to said first mobility entity (FA1) when said more preferred second mobility entity is available.
4. The method according to claim 1, 2, 3 or 4, characterized in that said macro mobility management is Internet Protocol-type, or IP-type mobility management, and that an agent advertisement message is sent from said second mobility entity (FA2) to said one mobile node (MS/MN) over said new connection, said agent advertising message enabling said one mobile

node (MS/MN) to detect a change of attachment point and to initiate mobile IP registration.

5. The method according to any one of claims 1 to 4, characterized by steps of

5 storing in said second access node (SGSN2) the identity of said preferred mobility entity (FA2) of said second access node,

checking in said second access node (SGSN2), in response to a movement of said one mobile node from said first access node (SGSN1) to said second access node (SGSN2), whether the identity of said first mobility entity (FA1) and said stored identity of said preferred mobility entity (FA2)  
10 match or not,

maintaining a connection to said first mobility entity (FA1) if the identities match, and

closing the connection to said first mobility entity (FA1) and opening  
15 a new connection to said preferred mobility entity (FA2) if said identities do not match.

6. The method according to any one of claims 1 to 5 in a radio access system, characterized in that said steps of closing and opening of the connection comprise steps of closing and opening of a packet protocol context.  
20

7. The method according to claim 6, characterized by steps of

transferring the packet protocol contexts of a mobile station which the mobile node is associated with from the first access node to the second  
25 access node, along with information which indicates which one or ones of the packet radio protocol contexts relate to the macro mobility management,

distinguishing the macro mobility management related packet protocol context(s) from possible other packet protocol contexts on the basis of said information at the second access node,

30 performing said steps of opening and closing solely on the macro mobility management related packet protocol context(s).

8. The method according to claim any one of claims 1 to 7, characterized in that said preferred mobility entity of said second access node is a foreign agent (FA2) associated with a gateway node (GGSN2) in said  
35 second part (RAN2) of the access network.

9. The method according to any one of claims 1 to 8, characterized in that said identity includes the address of the mobility entity (FA1, FA2).

- 5           10. An access system, comprising  
a plurality of mobile nodes (MS/MN),  
a first (SGSN1) and a second (SGSN2) access node serving said  
mobile nodes within the first (RAN1) and second (RAN2) parts of the access  
system, respectively,  
at least one first gateway node (GGSN1) for interfacing said first  
10 part of the access system with external networks (11),  
a first mobility entity (FA1) which is associated with said at least one  
first gateway node (GGSN1) and arranged to route a connection to any one of  
said mobile nodes while said mobile node is registered to the first part (RAN1)  
of the access system,  
15           characterized by  
the system being arranged to check whether there is a second mo-  
bility entity (FA2) which is more preferred in respect of routing than said first  
mobility entity (FA1),  
the system being arranged to open a new connection to said sec-  
20 ond mobility entity (FA2) if said more preferred second mobility entity (FA2) is  
available according to said checking,  
said mobile node (MS/MN) being arranged to detect a change of  
attachment by means of said new connection and to initiate macro mobility  
management registration.  
25           11. The system according to claim 10, characterized by a re-  
routing mechanism by which said connection initially routed via said first ac-  
cess node (SGSN1) and said first mobility entity (FA1) can be routed via said  
second access node (SGSN2) in response to a movement of said one of mo-  
bile nodes (MS/MN) to said second part (RAN2) of the access system.  
30           12. The system according to claim 10 or 11, characterized  
by said system being arranged to close a connection to said first mobility entity  
(FA1) when said more preferred second mobility entity (FA2) is available ac-  
cording to said checking.  
13. The system according to claim 10, 11 or 12, character-  
35 ized by



said macro mobility management being Internet Protocol-type, or IP-type, mobility management,

said second mobility entity (FA2) being arranged to send an entity advertisement message to said one mobile node (MS/MN) over said new connection,  
5

said mobile node (MS/MN) being arranged to detect a change of attachment by means of said entity advertising message and to initiate mobile IP registration.

14. The system according to any one of claims 10 to 13, characterized in that said preferred mobility entity of said second access node is a foreign agent (FA2) associated with a gateway node (GGSN2) in said second part (RAN2) of the access network.  
10

15. The system according to any one of claims 10 to 14, characterized in that said second access node (SGSN2) is arranged to make said checking.  
15

16. The system according to any one of claims 10 to 15, characterized in that the second access node (SGSN2) is arranged to store the identity, such as address, of the preferred foreign agent (FA2) for the checking purposes.

17. The system according to any one of claims 10 to 16, characterized in that said closing and opening of the connection comprise closing a packet protocol context in the gateway node (GGSN1) of the first mobility entity (FA1) and opening a packet protocol context in the gateway node (GGSN2) of the preferred mobility entity (FA2).  
20

18. The system according to claim 17, characterized in that said maintaining of the connection comprises updating of a packet protocol context of the mobile node (MS/MN) in the gateway node (GGSN1) of the first mobility entity (FA1).  
25

19. The system according to claim 17 or 18, characterized in that packet protocol contexts of a mobile station which the mobile node is associated with are associated with information which indicates which one or ones of the packet protocol contexts relate to the macro mobility management, and that the access node is arranged to distinguish the macro mobility management related packet protocol context(s) from possible other packet protocol contexts on the basis of said information and to said steps of opening and  
30  
35

closing solely on the macro mobility management related packet protocol context(s).

20. The system according to claim 19, characterized in that said information is provided in a message transferring the packet protocol context(s) from said other access node to said access node.

21. An access node for an access system comprising a plurality of mobile nodes (MS/MN), access nodes (SGSN1, SGSN2) serving said mobile nodes within respective parts (RAN1, RAN2) of the access system, at least two gateway (GGSN1, GGSN2) nodes for interfacing the access system with external networks (11), and at least two mobility entities (FA1, FA2) which are associated with different ones of said at least two gateway nodes (GGSN1, GGSN2) and arranged to provide macro mobility management routing services to the mobile nodes (MS/MN) while registered to the access system, characterized by said access node comprising

means for checking, when a mobile node (MS/MN) having a connection through another access node (SGSN1) and a first mobility entity (FA1) is accessing the system via said access node (SGSN2), whether there is another mobility entity which is more preferred in respect of routing than said first mobility entity (FA1),

means responsive to said checking means for opening a new connection to said preferred other mobility entity (FA2) if said more preferred other mobility entity (FA2) is available.

22. The access node according to claim 21, characterized by means for closing a connection to said first mobility entity (FA1) when said more preferred other mobility entity (FA2) is available.

23. The access node according to claim 21 or 22, characterized in that said checking means comprises

means for storing the identity, such as address, of said preferred other mobility entity (FA2) of said access node (SGSN2),

means for checking, in response to a movement of said mobile node (MS/MN) from said other access node (SGSN1) to said access node (SGSN2), whether the identity of said first mobility entity (FA1) and said stored identity of said preferred mobility entity (FA2) match or not.

24. The access node according to claim 21, 21 or 23, characterized in that said closing and opening means comprise

means for maintaining a connection to said first mobility entity (FA1) if the identities match, and

means for closing the connection to said first mobility entity (FA1) and opening new connection to said preferred mobility entity (FA2) if said  
5 identities do not match.

25. The access node according to any one of claims 21 to 24, characterized in that said access system is a radio access system, and that said means for closing and opening of the connection comprise means for closing a packet protocol context in the gateway node (GGSN1) of the first  
10 mobility entity (FA1) and opening a packet protocol context in the gateway node (GGSN2) of the preferred mobility entity (FA2).

26. The access node according to claim 25, characterized in that said means for maintaining the connection comprise means for updating a packet protocol context of the mobile node (MS/MN) in the gateway node  
15 (GGSN1) of the first mobility entity (FA1).


27. The access node according to claim 25 or 26, characterized in that packet protocol contexts of a mobile station which the mobile node is associated with are associated with information which indicates which one or ones of the packet protocol contexts relate to the macro mobility management, and that the access node is arranged to distinguish the macro mobility management related packet protocol context(s) from possible other packet protocol contexts based on said information and to perform said steps of opening and closing solely on the macro mobility management related packet protocol context(s).

28. The access node according to claim 27, characterized in that said information is provided in a message transferring the packet protocol context(s) from said other access node to said access node.

29. The access node according to any one of claims 21 to 28, characterized in that said macro mobility management is Internet Protocol-type, or IP-type, mobility management.  
30


1/3

Fig. 1

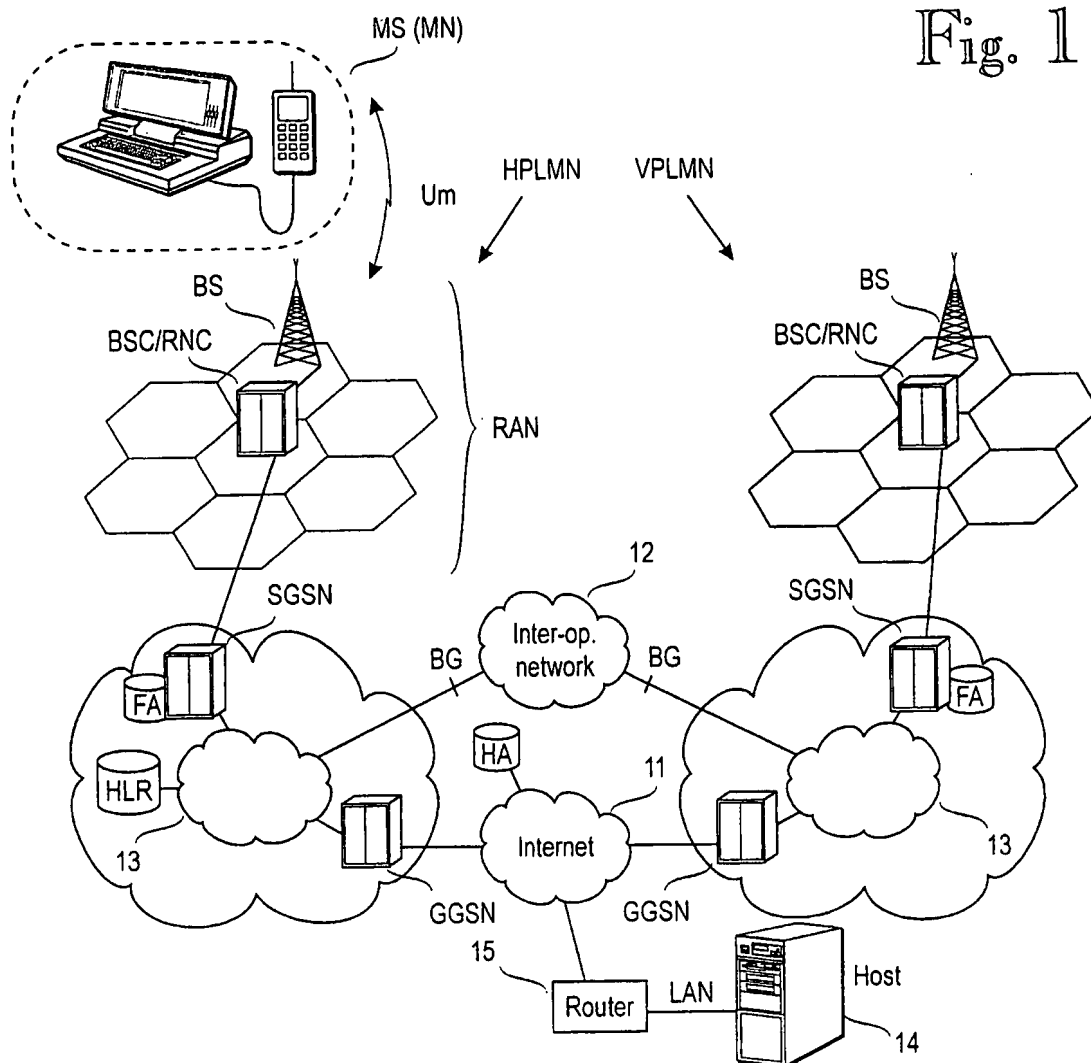

2/3

Fig. 2

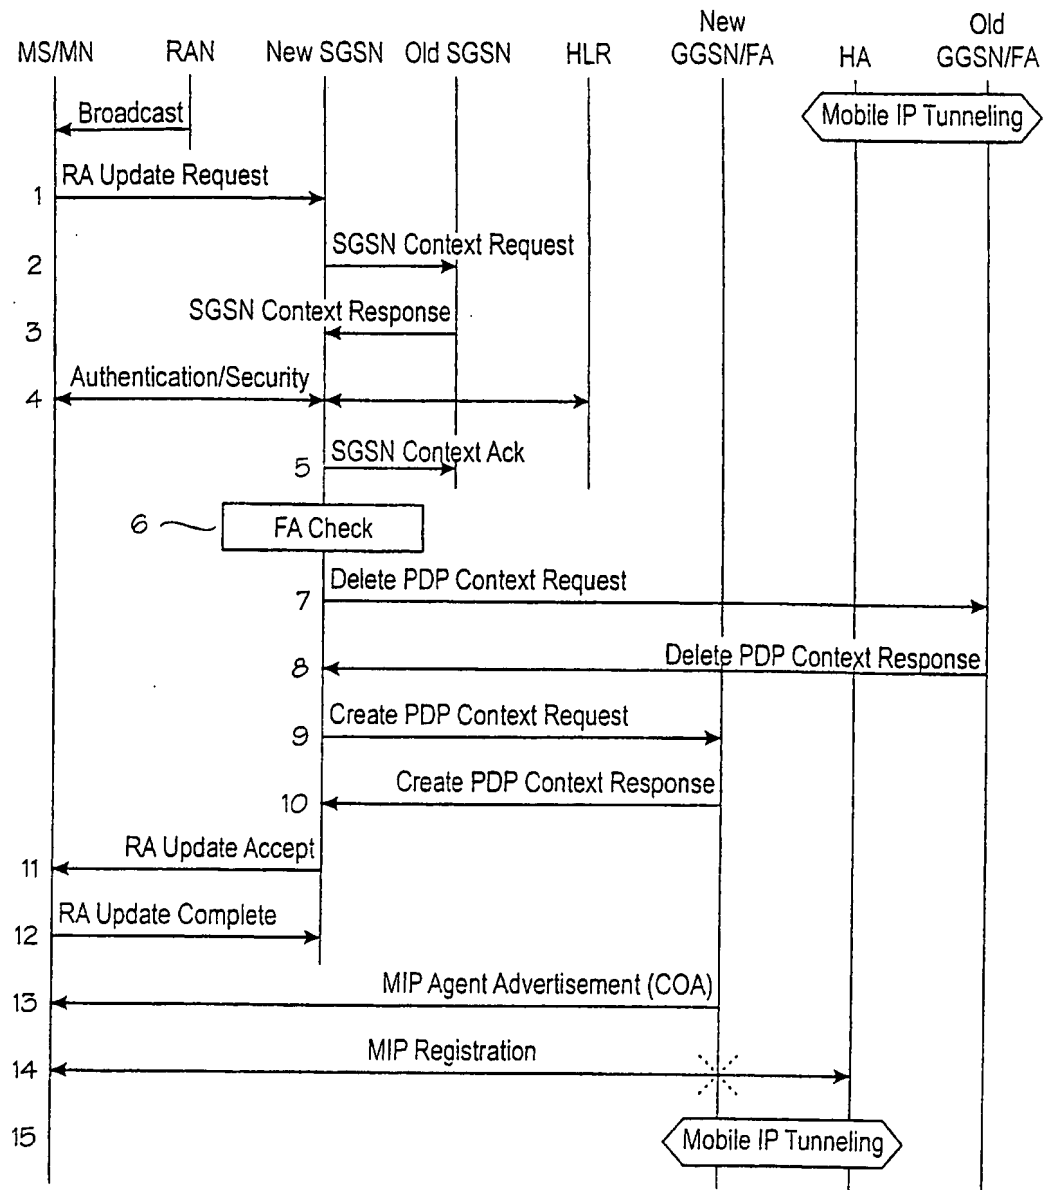

3/3

Fig. 3


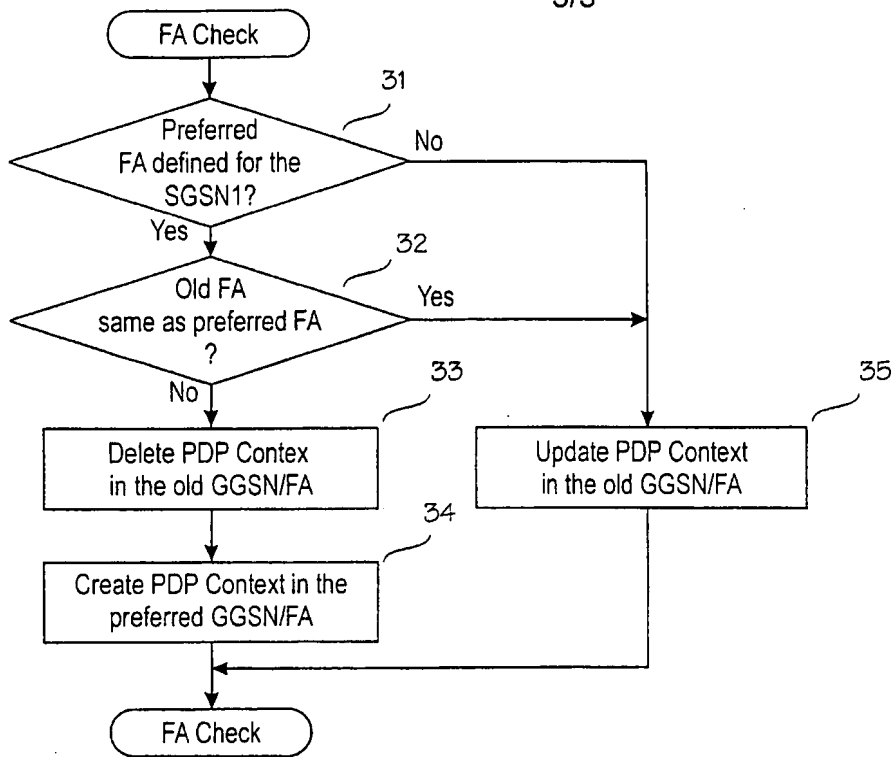


Fig. 4

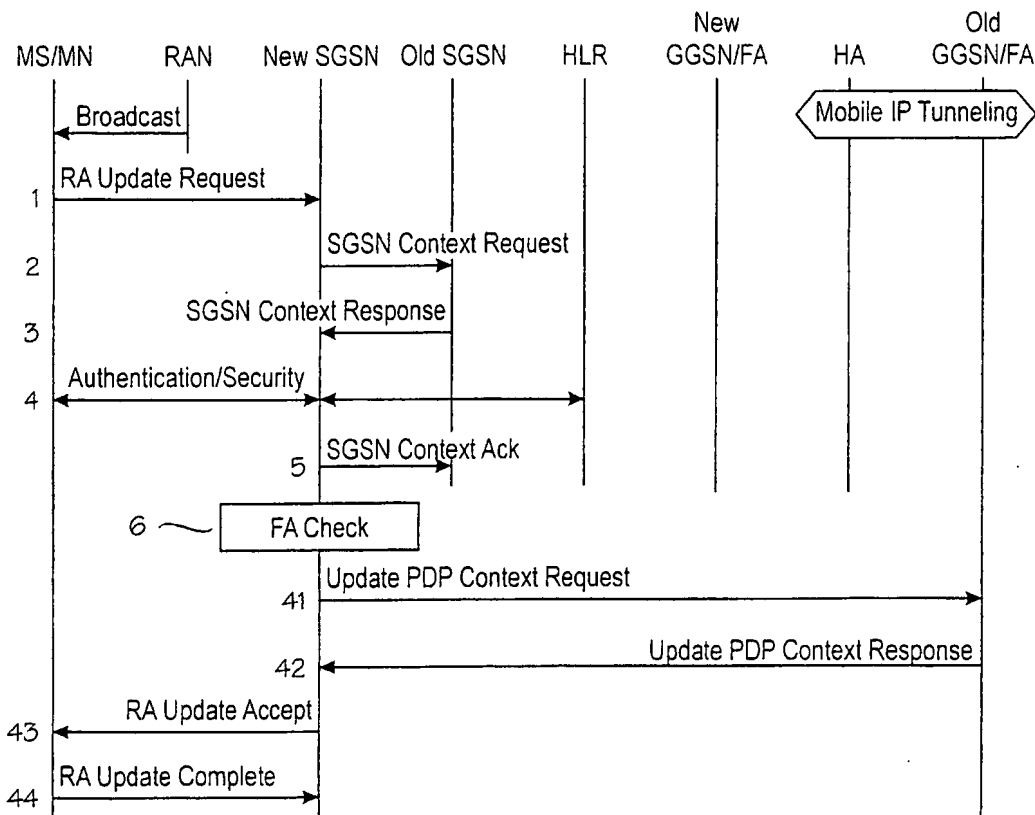

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 00/00178

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04Q 7/22, H04L 12/56, H04Q 7/38

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 9859468 A2 (NOKIA TELECOMMUNICATIONS OY), 30 December 1998 (30.12.98), page 6, line 7 - line 22; page 10, line 15 - page 11, line 10; page 13, line 9 - line 21, page 14, line 22 - line 26 --	1-29
Y	WO 9843446 A2 (TELEFONAKTIEBOLAGET LM ERICSSON), 1 October 1998 (01.10.98), page 15, line 22 - page 16, line 19, figure 7 --	1-29
E,X	WO 0014981 A1 (TELIA AB), 16 March 2000 (16.03.00), page 4, line 7 - page 7, line 21, figure 1 --	1-29

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

18 July 2000

Date of mailing of the international search report

21-07-2000

Name and mailing address of the ISA

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. + 46 8 666 02 86

Authorized officer

Nabil Ayoub / MRO

Telephone No. + 46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 00/00178

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9934635 A2 (TELEFONAKTIEBOLAGET LM ERICSSON), 8 July 1999 (08.07.99), page 3, line 7 - line 23  -- -----	1-29



**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

02/12/99

International application No.  
PCT/FI 00/00178

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
WO	9859468	A2	30/12/98	AU	7920998 A	04/01/99
				EP	0920761 A	09/06/99
				FI	972725 A	25/12/98
-----						
WO	9843446	A2	01/10/98	AU	6531598 A	20/10/98
-----						
WO	0014981	A1	16/03/00	NONE		
-----						
WO	9934635	A2	08/07/99	AU	2193699 A	19/07/99
				NO	976150 A	01/07/99
-----						